



Altech®

FLEX Power Supplies


150% Power Boost for 3 Minutes ... *the longest time in the industry*

More flexibility in input voltage

The FLEX line of power supplies are suitable to a wide range of input voltage. With a single type it is therefore possible to meet the requirements of more applications and consequently improve design activity and stock management.

Benefits

- 150% Power Boost
- Available in 1, 2, and 3-phase
- Output current up to 25A
- Three overload / short circuit protection modes
- Snap-on DIN rail bracket
- Compact Housing
- High efficiency up to 92%
- Over temperature protection
- LED indicator for power on
- 3 year warranty

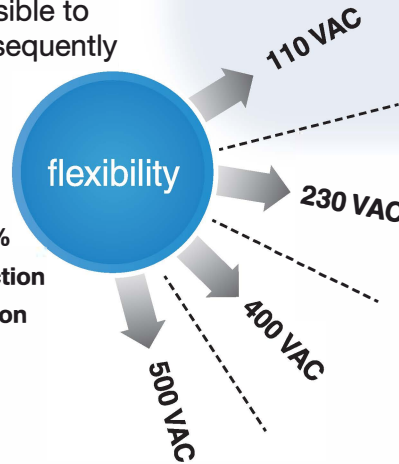

More Unique Advantages

- DC OK LED
- Input power options
- Continuous output mode
- Maximum peak power time
- Manual reset mode protection
- Hiccup Mode Automatic Restart
- Easy parallel connection



PSA series

FLEX Power Single Phase
24V DC Power Supplies

PSB series

FLEX Power Two and
Three Phase
24V DC** Power Supplies

**Other output voltages on request.

Approvals

- UL508 listed for US and Canada
- IEC/EN 60950 (VDE 0805) and EN50178 (VDE 0160)
- I/O separation SELV EN60950-1, PELV EN60204-1
- EMC immunity EN61000-4-2; EN61000-4-3; EN61000-4-4; EN61000-4-5
- EMC emission EN61000-6-4; EN61000-3-2
- Safety EEM EN60204-1
- CE marked according 2014/30/UE
- LVD 2014/35/UE



CBC
CARLTON-BATES COMPANY®
A SUBSIDIARY OF WESCO DISTRIBUTION, INC.

Altech Corp.®

Your Source for Automation & Control Components

www.AltechCorp.com/POWER
or 908.806.9400 for all the details

Flex Line DIN Rail Power Supplies PSA and PSB Type / 24V DC Solution

Comparison (5A unit)

	Standard SMPS	High performance SMPS	Altech® Flex
Input power options	110 or 230 VAC	110 or 230 VAC	110, 230, 400, 500 VAC
Nominal output voltage	24 V DC	24 V DC	24 V DC
Output voltage range	24 V DC ... 28 V DC	24 V DC ... 28 V DC	22 V DC ... 27 V DC
Nominal output current	5A	5A	5A
Power boost peak power	N/A	7.5 A	7.5A
Continues output mode	N/A	N/A	12A
Max. peak power time	n/a	5 seconds	3 minutes
Hiccup mode protection, automatic restart	yes	yes	YES
Manual reset mode protection	no	no	YES
Continues output mode protection	no	no	YES
DIN rail mount	yes	yes	YES
Easy parallel connection	No	no	YES
Price	\$	\$\$\$\$	\$\$

Power Good relay for monitoring the output voltage level

Output voltage is continuously monitored. The units 24 VDC output are equipped with Power Good relay. The NO contact triggers any time the output voltage level goes below 20VDC (24 VDC output). This feature is particularly useful in redundant applications.

Thermo-magnetic Circuit Breakers

Standard output circuit breakers can be triggered quickly and reliably with FLEX technology, which allows three times the nominal current at 60°C. Defective current paths are selectively disconnected, the defect is limited and the important parts of the system remain in operation. This together with the 50% overload capacity in compliance with EN60204-1 allows to safely manage any overload and short circuit condition.

Product Range

Model	Output Current A	Input Voltage V AC	Output voltage V DC
PSA-6024	3	110 - 230	24
PSA-12024	5	110 - 230	24
PSA-18024	7.5	110 - 230	24
PSA-36024	14	110 - 230	24
PSA-60024	25	110 - 230	24
PSB-12024	5	230-400-500	24
PSB-18024	7.5	230-400-500	24
PSB-36024	14	230-400-500	24
PSB-60024	25	400-500 3ph	24

Hiccup Mode Automatic Restart

This is the default factory setting of all FLEX Power units. In case of short circuit or overloading, the output current is interrupted. The device tries again to re-establish output voltage and normal condition about every 2 second till the problem is cleared.

Continuous Output Mode

In case of short-circuit or overload, the output current is kept at high values with near zero voltage. In case of short circuit the current can reach up to 3 times the rated current at 60°C. This protection mode is used to meet the requirements of demanding loads such as motors, solenoid valves, lamps, PLC with highly capacitive input circuits and other loads with marked transient overload behavior.

Manual Reset Mode Restart by Operator

In case of short-circuit or overload, the output current is interrupted. In order to restart the output it is necessary to switch-off the input circuit for about 1 minute. This protection mode is particularly suggested in applications where safety procedures require that reset be carried out only by an authorized person.